

Mobile Stations

Technical data:

- Volume up to 60 m³

Purpose:

- Storage of Diesel and Petrol, optionally AdBlue.
Lower purchasing costs of fuel and better consumption control

Tank characteristics:


- Design according to: EN 12285-2 class A or B or according to DIN6616
- Technical documentation approved by Notified body
- Basic material – S235JR according to EN10025-1
- Single or multi-compartment tank
- Working temperature from -20°C to +50°C

Models CG3 and CG5:

- Walls made from trapezoid plates, insulated flat plates possible
- Electric shutter doors
- Ex lamps

Options:

- Stickers with logo on the sides
- Loading pumps

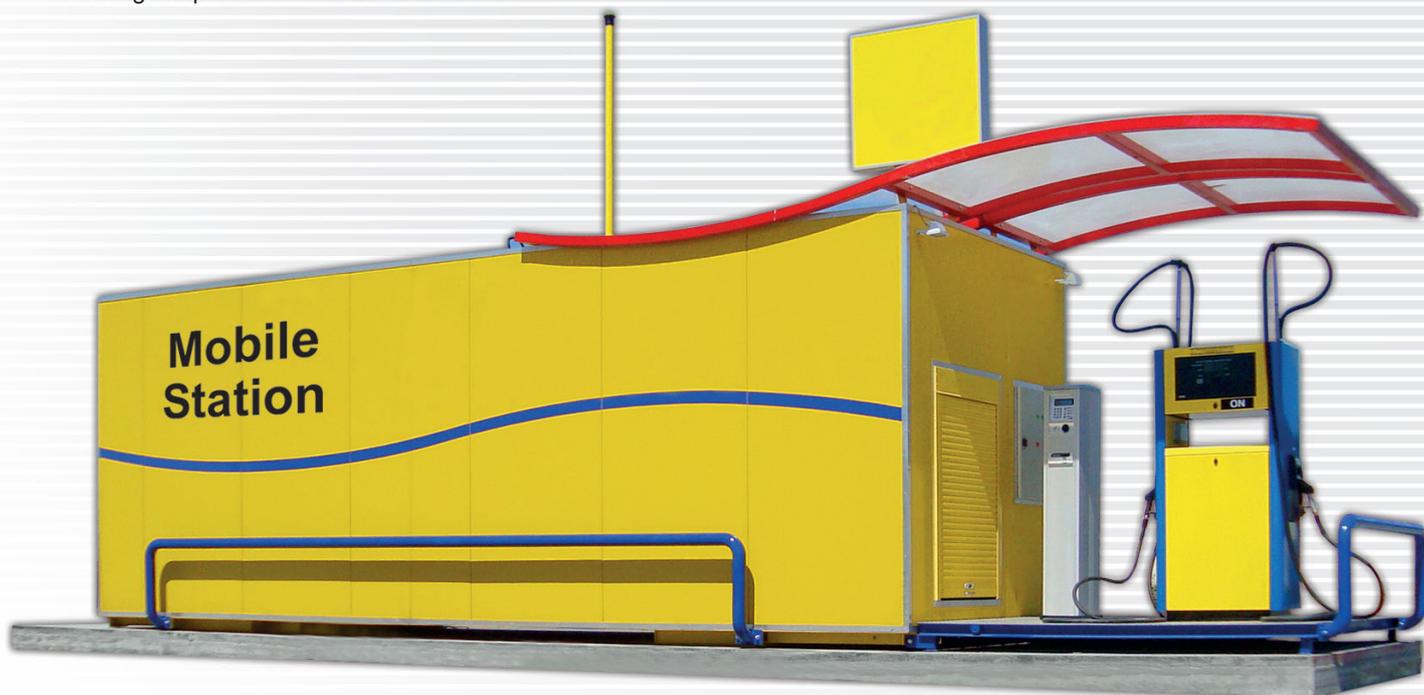

<p>CG1</p>		
<p>CG3</p>		
<p>CG4</p>		
<p>CG5</p>		

Additional options

Monitoring and measurement system - PetroVend (OPW)	Monitoring system SGB	Loading pump	Electrical installation	Additional lighting	Insulated flat wall

