

Multi-functional check valve for fuel dispensers



- **Cost saving with double wall pipework**
- **Without disassembling**
 - Measure the depression of the pump
 - Drain the pump
 - Isolate the pump of the pipework
 - Check the pipework
- **Compact**


Multi-functional check valve for fuel dispensers

Very convenient with double wall pipework.

Multi-functional, allowing maintenance and testing without disconnecting the dispenser from the pipework :

- Two screws to lock the valve in closed position, allowing to pressure test the suction line
- A gauge point allows the drainage of the pump
- This facility also permits to measure the pump's depression and to break the vacuum

Pressure Loss (kPa) against Flow (l/min)

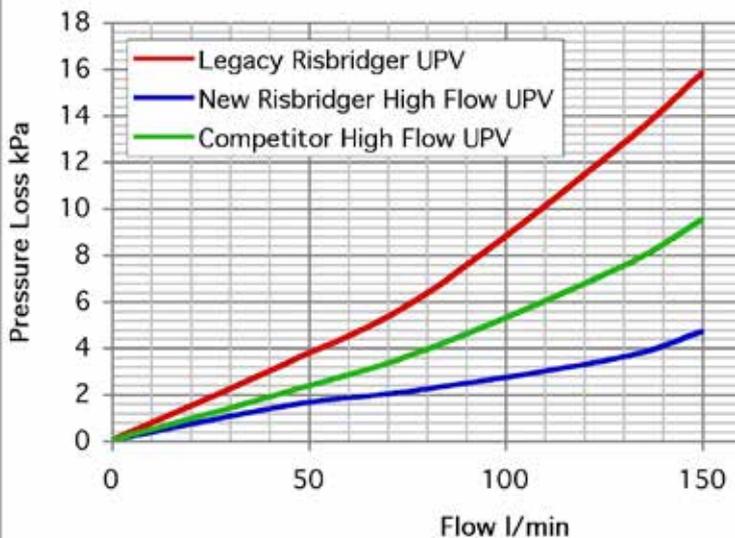

- Small for easy retrofit “Sandwich” installation
- Dimensions : Diameter 76mm / height 36mm
- Full bore passage : 1 1/2”
- Low pressure drop till 150liter/min
- Materials :
 - VITON gaskets
 - Anodized Aluminium body
- Suitable for Ethanol containing fuels, diesel, bio-diesel
- Installation with 2 bolts with oval flanges or with 3 bolts with triangular flanges
- Flanges optional

Also available in stainless steel for AdBlue : UPV-SS-10



CGH Belgium nv
Rijksweg 10 C
B- 2880 BORNEM
Tel.: +32 (0)3 459 80 76
E-mail: info@cghbelgium.com

www.cghbelgium.com

Risbridger -EN- 20150826
Non contractual document